


# Product & Solutions Guide

SPRING 2024 **ISSUE 128**

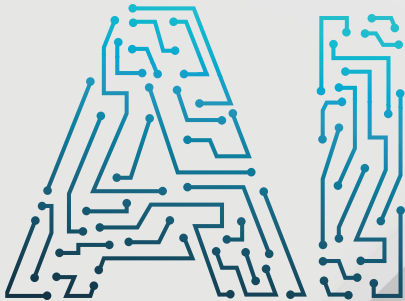

# technology

Powering the new generation of  
video security solutions

## Brivo + Alibi Cloud VS

Cloud Access Control  
with Video Surveillance

**Page 26**

## IntelliSearch Technology

AI-powered color attribute capture  
and search for human/vehicles

**Page 4**

## SmartSense Analytics

AI-driven human/vehicle  
detection to reduce false alarms

**Page 4**



# Why Alibi Security?

Alibi Security is a trusted source for innovative, reliable video surveillance and access control solutions—serving thousands of security professionals for more than 30 years. We are committed to treating every customer as a true partner—taking the time to understand their needs and investing in the PEOPLE, SOLUTIONS and SUPPORT required to make them successful.

**PROUDLY HEADQUARTERED IN AUSTIN, TEXAS**

Call to speak with a security expert today: **888.858.1440**

**ALIBI® PRODUCTS & ACCESSORIES**

- Key Features & Benefits ..... 4
- Analytics Overview .....5
- Network Video Recorders ..... 8
- Camera Technology & Optics .....12
- Cameras.....14
- Brackets & Accessories ..... 29

**ALIBI® CLOUD VS**

Cloud to Cloud Surveillance ..... 29

**ALIBI® HYBRID CLOUD**

Cloud Backup + AI Analytics..... 29

**ALIBI SECURITY**

## Your Partner in Growth

Our entire business has been designed to support you, the Security Professional. When you do business with Alibi Security, you get much more than quality products at competitive prices—you get a dedicated business partner who listens to your needs, and is invested in your growth.



**The Latest Technology**

Our differentiated, limited-distribution on-premise and cloud-based solutions enable you to stand out from the competition.



**Dedicated Account Managers**

A single point of contact for pre- and post-sales support to ensure you close more business and stay on schedule.



**Dealer-Friendly Fulfillment**

Our supply chain and fulfillment operations ensure that the products you need are in stock and delivered on time.



**Protected Pricing Policies**

Competitive everyday pricing, dealer volume discounts, and strictly enforced MAP policies protect your margin opportunities.



**US-Based Technical Support**

Our technical support team is located in Austin, TX and delivers industry leading response times. One call, problem solved.



**Product Integration Capabilities**

We employ a full-time team to help with installation, customization and configuration services to make your job easier.

**ALIBI ARSENAL**

## Tools to Help You Grow

We understand that marketing can be expensive, time-consuming and frustrating. So we developed a powerful marketing platform, based on Dealer feedback, to deliver professional content, and provide turnkey tools and services—all designed to elevate your brand, and help grow your business.

**Branded Resources**

ALL Dealers are provided a FREE website, featuring sales & marketing resources, branded for YOUR business

**Email Marketing Campaigns**

We offer TURNKEY email campaigns, to reach targeted prospects and promote YOUR solutions & services.

**Customer Reviews Engine**

Our TURNKEY reviews engine makes it easy to generate positive reviews for YOUR business in 3 simple steps.

**GETTING STARTED IS EASY AND FREE!**

Simply contact your Dedicated Account Manager, or call the Alibi Arsenal Hotline at **877.662.7502**



# High-Performance Solutions For Virtually Any Security Challenge

## UNCOMPROMISING PERFORMANCE...UNPARALLELED USABILITY

We believe in delivering video security solutions that simply work. Our goal is to provide you video solutions for a variety of applications and any budget. Alibi solutions are designed—based on dealer partner feedback—to deliver the best possible user experience, from installation to operation.

### Alibi Vigilant Delivers Scalable Solutions with Powerful Features

- ✓ Ultra high res—up to 8MP / 4K options
- ✓ Starlight models—for low light applications
- ✓ Up to 128-channel network recorders
- ✓ Ultra H.265 compression technology
- ✓ Long distance power-over-ethernet
- ✓ Intuitive, full-featured user interface
- ✓ Powerful analytics like human and vehicle detection
- ✓ 3-year warranty



**FC** All Vigilant gear has been approved by the Federal Communications Commission.

**NDA** Products that meet technical specifications under NDA Section 889 Part A.



### The Latest AI Technology Built-In With No Additional Cost to You!

#### SmartSense

Advanced algorithms help these cameras identify humans and vehicles with incredible accuracy.

See page 12 for more info

#### IntelliSearch

AI-designed cameras capture color attributes on humans/vehicles and AI-powered recorders allow you to search metadata to find colors by person or vehicle.


See page 14 for more info

# Powerful Video Analytics Included

## WANT MORE FROM YOUR SECURITY SOLUTION?

All Alibi video surveillance solutions support powerful video analytics. From motion alerts, to human detection to line crossing, our cameras and recorders help you build powerful, effective security solutions for your customers.

Set up real-time alerts & notifications

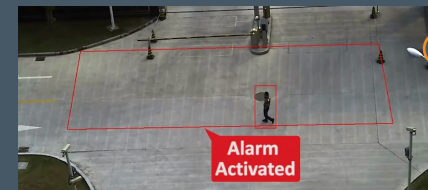

#### Intrusion Detection

Object recognition in a defined zone. Set criteria based on object size and time duration.



#### Line Crossing

Provides alerts when objects cross a virtual fence (choose single or bi-directional)




#### Audio Exception Detection

Detects sudden changes in sound intensity



#### Tamper Detection

Sends an alert if the viewing angle changes, or has been blocked

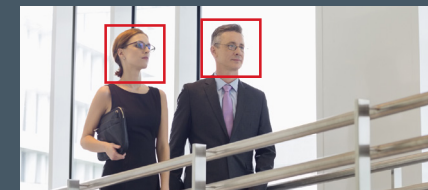


#### Face Detection

Detects and provides snapshots of faces to aid in identification



#### Unattended Baggage

Detects suspicious objects and unattended baggage

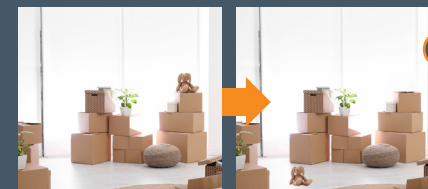

#### Object Moving

Stationary item moves from its location but stays in scene



#### Defocus Detection

Notifies of loss of image sharpness as a result of defocusing or dirtying of the camera lens



#### Scene Change Detection

Detects changes to the reference frame, such as if the camera angle changes



#### Object Removal Detection

Detects objects that are left or removed from a scene



#### People Counting

Provides directional counting information



#### Human/Vehicle Detection

Accurate human and vehicle detection driven by AI technology


ALIBI VIGILANT FIRMWARE

# Powerful Features, Easy to Use

All Alibi Vigilant gear features powerful firmware that makes the solution easy to setup and manage. Plus, you get access to a powerful mobile app that puts powerful security features in your customer's hands—literally.

## Intuitive Firmware with Powerful Features

Alibi Vigilant recorders and cameras include the latest firmware featuring simple navigation, smart analytics and powerful cloud capabilities to make managing and updating the system easy.

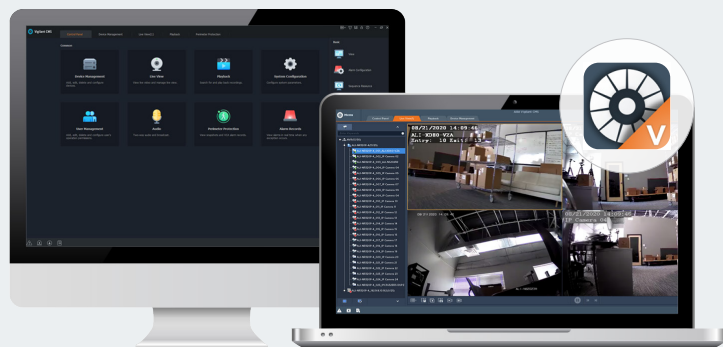

### Key features of Alibi Vigilant firmware include:

- **Intuitive User Interface:** Simple to navigate and use
- **Unified Device Management:** IP cameras, DVRs, NVRs, storage servers, stream servers, video wall controllers, etc.
- **Flexible Recording:** Local recording, alarm-triggered recording, scheduled recording, and recording download
- **Auto Device Search:** Add devices by domain name/IP address; add devices and adjust the time in batch configuration
- **Flexible Live View Configs:** Up to 64 live view channels (on up to 4 monitors) and sequence display, corridor mode, two-way audio, and audio broadcast
- **Smart Playback:** Retrieve footage by time/event, local/remote playback, async/sync playback, VOD for different speed, smart search and SD card search
- **PTZ Controls:** Pan, tilt, zoom, 3D positioning, preset, patrol, pattern, and patrol plan
- **Analytics Reporting:** Generate statistics against enabled analytics; daily/weekly/monthly/yearly report export

## Configuration & Management Tools

Alibi Vigilant Toolbox is a comprehensive suite of tools that help you configure, troubleshoot and manage solutions.

**Device Management:** Search for devices; Change device password and IP; Configure device remotely including device name, time and network.

**Channel Management:** Configure the image, encoding, OSD, and audio (for IPC only) settings.

**Batch upgrade:** Upgrade devices using an upgrade file on the PC; Upgrade devices with Internet connection.

**Device Maintenance:** Restore device to default settings; Import and export device configuration; export diagnosis info; Restart device.

**IP Camera & NVR Channel Management:** Add or delete channels.

**Storage calculator:** Calculate the allowed recording time based on the given disk space; Calculate the required disk space based on the given recording time.

# Powerful Cloud-Based Management

## REDUCE TRUCK ROLLS WITH REMOTE ADMINISTRATION

### Remote Management Capabilities include:

- Setting up intrusion zones and analytics
- Managing users
- Checking system health
- Cloud firmware updates
- Download recorded footage
- Reset/reboot cameras & recorders

View all customer systems in one pane of glass.


Call for a demo and learn how to generate RMR from this built-in capability.



## Alibi Recorders Reduce Storage Needs with Ultra H.265

### REDUCE BANDWIDTH AND STORAGE REQUIREMENTS UP TO 80%

Ultra H.265 is the latest video compression format that offers a vast improvement in image quality and bandwidth over older generation technologies. It also allows for faster, more fluid remote viewing, and the ability to view more channels remotely.

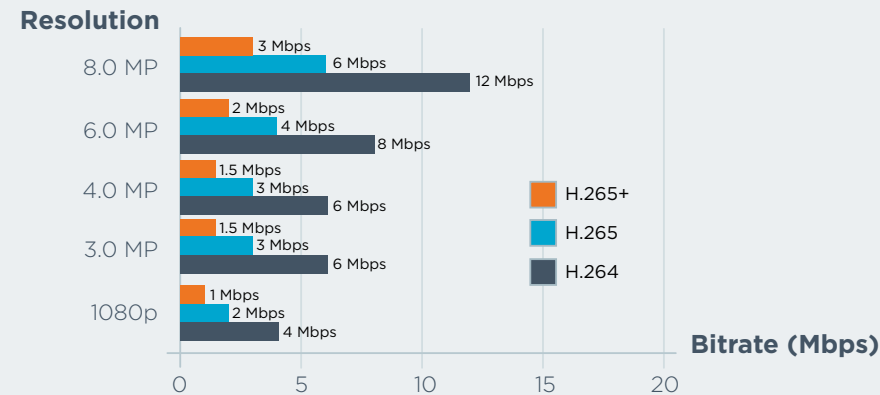

### Vigilant How-to Resources

Looking to add the Vigilant line to your video security offerings but don't know where to start? Want to get your techs ramped up installing and managing Vigilant? Visit the Alibi Security YouTube channel and find everything you need to learn about this powerful line of cameras and recorders.



## Flex Series Network Recorders

**Features Include:**

- Support Ultra 265/H.265/H.264 video formats
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ALI-NR041F-1 features HDMI and VGA simultaneous outputs; 8TB Total Storage
- ALI-NR081F-2 & ALI-NR161F-2 feature HDMI and VGA independent outputs; 10TB-20TB Total Storage
- Up to 16MP resolution recording
- Support Cloud firmware updates
- All three recorders are NDAA compliant



		RACK-MOUNTABLE	RACK-MOUNTABLE
	4-Channel Network Video Recorder	<b>NEW!</b> 8-Channel ULTRA H.265 NVR	<b>NEW!</b> 16-Channel ULTRA H.265 NVR
	ALI-NR041F-1	ALI-NR082F-2	ALI-NR162F-2
<b>IP VIDEO INPUT</b>	4-ch	8-ch	16-ch
<b>TWO-WAY AUDIO INPUT</b>	1-ch, RCA		
<b>INCOMING BANDWIDTH</b>	80Mbps	320Mbps	
<b>OUTGOING BANDWIDTH</b>	64Mbps	160Mbps	
<b>REMOTE USERS</b>	128		
<b>PROTOCOLS</b>	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, RTSP, IPV6	
<b>RECORDING RESOLUTION</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
<b>AUDIO OUTPUT</b>	1-ch, RCA		
<b>SYNCHRONOUS PLAYBACK</b>	4-ch	8-ch	16-ch
<b>DECODING FORMAT</b>	Ultra 265/H.265/H.264		
<b>LIVE VIEW/PLAYBACK</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
<b>CAPABILITY</b>	Ultra 265/H.265: 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 9 x 4MP@25, 10 x 3MP@30, 16 x 1080p@30 H.264: 3 x 4K@30, 5 x 5MP@30, 7 x 4MP@30, 8 x 4MP@25, 9 x 3MP@30, 14 x 1080p@30	"Ultra 265/H.265: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30, 32 x 960P@25 H.264: 2 x 16MP(4800 x 2688)@30, 2 x 12MP@30, 2 x 4K@30, 4 x 5MP@30, 6 x 4MP@30, 8 x 3MP@30, 14 x 1080P@30, 30 x 720P@30, 32 x D1"	
<b>SATA</b>	1 SATA interfaces	2 SATA interface	
<b>CAPACITY</b>	Up to 8TB for each disk	up to 10TB for each disk	
<b>VCA DETECTION BY CAMERA</b>	Face Detection, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, SMD(Smart Motion Detection)	Vehicle Detection, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Temperature Detection(Fire Detection, Smoking Detection, Temperature Measurement, Smoke and Fire Detection), UMD(Ultra Motion Detection), Video Metadata, Traffic Monitoring	
<b>VCA SEARCH</b>	Face Search, Behavior Search, People Counting Report	Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report	
<b>POWER SUPPLY</b>	48V DC/1.35A Power Consumption: ≤10 W (without HDD)	"100 - 240V AC Power Consumption: ≤ 20W (without HDD)"	
<b>WORKING ENVIRONMENT</b>	14°F - +131°F, Humidity ≤ 90% RH (non-condensing)		
<b>DIMENSIONS (W×D×H)</b>	10.2" x 8.7" x 1.8"	15.0"×12.7"×2.1"	
<b>NDAA COMPLIANT</b>	Yes		

## Performance Series Network Recorders

**Powerful features include:**

- 16-32 Channel Count Support
- H.265, H.264 Compression
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- HDMI and VGA independent outputs
- Up to 16MP recording resolution
- Support Cloud firmware updates
- RJ-45 Ethernet Interface



ALI-NR162P-4 | ALI-NR322P-4

	RACK-MOUNTABLE	RACK-MOUNTABLE
	<b>NEW!</b> 16-Channel Ultra H.265 NVR	<b>NEW!</b> 32-Channel Ultra H.265 NVR
	ALI-NR162P-4	ALI-NR322P-4
<b>IP VIDEO INPUT</b>	16-ch	32-ch
<b>TWO-WAY AUDIO INPUT</b>	1-ch, RCA	
<b>INCOMING BANDWIDTH</b>	320Mbps	
<b>OUTGOING BANDWIDTH</b>	160Mbps	
<b>REMOTE USERS</b>	128	
<b>PROTOCOLS</b>	TCP/IP,P2P,UPnP,NTP,DHCP,PPPoE,HTTP,HTTPS,DNS,DDNS,SNMP,SMTP,RTSP,802.1x,IPV6	
<b>RECORDING RESOLUTION</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF	
<b>AUDIO OUTPUT</b>	1-ch, RCA	
<b>SYNCHRONOUS PLAYBACK</b>	16-ch	
<b>DECODING FORMAT</b>	Ultra 265/H.265/H.264	
<b>LIVE VIEW/PLAYBACK</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
<b>CAPABILITY</b>	Ultra 265/H.265: 2 x 16MP@30, 2 x 12MP@30, 4 x 4K@30, 6 x 5MP@30, 8 x 4MP@30, 10 x 3MP@30, 16 x 1080P@30, 32 x 960P@25 H.264: 2 x 16MP(4800 x 2688)@30, 2 x 12MP@30, 2 x 4K@30, 4 x 5MP@30, 2 x 4K@30, 4 x 5MP@30, 6 x 4MP@30, 8 x 3MP@30, 14 x 1080P@30, 30 x 720P@30, 32 x D1	
<b>SATA</b>	4 SATA interface	
<b>CAPACITY</b>	up to 10TB for each disk	
<b>VCA DETECTION</b>	Face Detection, Face Comparison, Vehicle Detection, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Temperature Detection(Fire Detection, Smoking Detection, Temperature Measurement, Smoke and Fire Detection), UMD(Ultra Motion Detection), Video Metadata, Traffic Monitoring	
<b>VCA SEARCH</b>	Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report	
<b>STATISTICAL ANALYSIS</b>	People counting	
<b>POWER SUPPLY</b>	100-240V AC Power Consumption: ≤ 20W (without HDD)	
<b>WORKING ENVIRONMENT</b>	-10°C-+ 55°C (+14°F-+131°F), Humidity ≤ 90% RH (non-condensing)	
<b>DIMENSIONS (W×D×H)</b>	15.7" x 14.3" x 2.9"	
<b>NDAA COMPLIANT</b>	Yes	



**Surveillance-Class Hard Drive**

Western Digital is a leader in video surveillance storage. WD Purple drives are designed to meet the challenges of 24x7 video surveillance recording. Designed with exclusive AllFrame™ technology that helps reduce frame loss and improve overall video playback.

*\*Pre-installed HDDs are mounted, formatted, initialized, and supported by Alibi Security.*

## Performance Series Network Recorders

### Network Video Recorder

- Support Ultra 265/H.265/H.264 video formats
- Up to 16MP recording resolution
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C,



ALI-NR322P-8  
ALI-NR641P-8

ALI-NR1281X-16 | ALI-NR1281XAI-16 Built-in AI card adds human/vehicle detection to any camera

	RACK-MOUNTABLE	RACK-MOUNTABLE	RACK-MOUNTABLE
	32-Channel Ultra H.265 NVR	64-Channel Ultra H.265 NVR	NEW! 128-Channel ULTRA H.265 NVR with RAID
	ALI-NR322P-8	ALI-NR641P-8	ALI-NR1281X-16
<b>IP VIDEO INPUT</b>	32-ch	64-ch	128-ch
<b>TWO-WAY AUDIO INPUT</b>	1-ch, RCA		
<b>INCOMING BANDWIDTH</b>	320Mbps		512 Mbps
<b>OUTGOING BANDWIDTH</b>	160Mbps		512Mbps
<b>REMOTE USERS</b>	128		
<b>PROTOCOLS</b>	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP		TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
<b>RECORDING RESOLUTION</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF		12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
<b>AUDIO OUTPUT</b>	1-ch, RCA		
<b>SYNCHRONOUS PLAYBACK</b>	16-ch		
<b>DECODING FORMAT</b>	Ultra 265/H.265/H.264		
<b>LIVE VIEW/PLAYBACK</b>	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		VGA: 1/4/6/8/9/16/25/36 HDMI1, HDMI2: 1/4/6/8/9/16/25/36/64
<b>SATA</b>	8 SATA interfaces		16 SATA interfaces
<b>CAPACITY</b>	Up to 12TB for each disk		Up to 16TB for each HDD
<b>VCA DETECTION</b>	Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, UMD(Ultra Motion Detection)		Face Detection, Face Comparison, Intrusion Detection, Cross Line Detection, Enter Area, Leave Area, Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Temperature Detection(Fire Detection, Smoking Detection, Temperature Measurement, Smoke and Fire Detection), Ultra Motion Detection(UMD), Video Metadata (Mixed-Traffic Detection), Traffic Monitoring
<b>VCA SEARCH</b>	Behavior Search, People Counting Report, Vehicle Search		Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, Search by Image, People Counting Report
<b>NETWORK INTERFACE</b>	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		4 RJ-45 10M/100M/1000M adaptive Ethernet Interface
<b>USB INTERFACE</b>	Front: 2 x USB2.0, Rear panel: 1 x USB3.0		Front panel: 2 x USB2.0, Rear panel: 2 x USB3.0
<b>POWER SUPPLY</b>	100-240V AC Power Consumption: ≤ 32W (without HDD)		100 - 240V AC Power Consumption: ≤ 200 W (without HDD)
<b>WORKING ENVIRONMENT</b>	14°F-131°F		
<b>DIMENSIONS (W×D×H)</b>	17.4" × 16.8" × 3.5"		21.0" × 19.0" × 5.1"
<b>WEIGHT (WITHOUT HDD)</b>	8.80lb		27.56 lb
<b>NDAA COMPLIANT</b>	Yes		

## Flex Series Hybrid Recorders

### Hybrid technology supports both IP and HD-TVI Cameras

- HDMI/VGA simultaneous outputs; HDMI output up 4k; VGA output 1080p
- Support 1 channel HDMI output, 1 channel VGA output up to 1920\*1080
- Supports Audio Over Coax (AOC)
- Long transmission distance over coaxial cable



ALI-HR042F-1  
ALI-HR082F-1

ALI-HR162F-2 | ALI-HR320F-2

### Surveillance-Class Hard Drive



Western Digital is a leader in video surveillance storage. WD Purple drives are designed to meet the challenges of 24x7 video surveillance recording. Designed with exclusive AllFrame™ technology that helps reduce frame loss and improve overall video playback

*\*Pre-installed HDDs are mounted, formatted, initialized, and supported by Alibi Security.*

			RACK-MOUNTABLE	RACK-MOUNTABLE
	4-Channel 8MP Analog	8-Channel 8MP Analog + 8MP IP	16-Channel 8MP Analog + 8MP IP	32-Channel 8MP Analog + 8MP IP
	ALI-HR042F-1	ALI-HR082F-1	ALI-HR162F-2	ALI-HR320F-2
<b>ANALOG VIDEO INPUT</b>	4-ch, BNC	8-ch, BNC	16-ch, BNC	32-ch, BNC
<b>IP VIDEO INPUT</b>	2-ch(only IP up to 6ch), each channel up to 4MP	4-ch(only IP up to 12ch), each channel up to 8MP	8-ch(only IP up to 24ch), each channel up to 4K	4-ch(only IP up to 36ch), each channel up to 8MP
<b>AUDIO INPUT</b>	1-ch, RCA			
<b>CVBS OUTPUT</b>	1-ch, BNC			
<b>AUDIO OUTPUT</b>	1-ch, RCA			
<b>SYNCHRONOUS PLAYBACK</b>	4	8	16	
<b>LIVE VIEW DISPLAY</b>	HDMI/VGA: 1/4/6/8/9	HDMI/VGA: 1/4/6/8/9/16	HDMI/VGA: 1/4/6/8/9/16/25	HDMI/VGA: 1/4/6/8/9/16/25/36
<b>TWO-WAY AUDIO</b>	1-ch, RCA			
<b>INCOMING BANDWIDTH</b>	40Mbps (Up to 48Mbps after all analog channel conversion)	40Mbps (Up to 56Mbps after all analog channel conversion)	80Mbps (Up to 112Mbps after all analog channel conversion)	80Mbps (Up to 144Mbps after all analog channel conversion)
<b>OUTGOING BANDWIDTH</b>	48Mbps	64Mbps	160Mbps	
<b>RECORDING RESOLUTION</b>	8MP Lite/5MP/5MP Lite/4MP Lite/1080P/720P/CIF		8MP Lite/5MP Lite/4MP Lite /1080P/720P/960H/D1/CIF	8MP Lite/5MP Lite/4MP Lite /1080P/720P/D1
<b>RECORDING FRAME RATE</b>	Main stream: 8MP Lite@8fps, 5MP Lite @12fps, 4MP Lite@15fps, 1080P@15fps, 720p@30fps Sub stream: D1@8fps, D1@12fps, D1@15fps, D1@15fps, D1@30fps		Main stream: 8MP Lite@8fps, 5MP Lite@12fps, 4MP Lite@15fps, 1080P@15fps, 720P@30fps Sub stream: D1@8fps, D1@12fps, D1@12fps, D1@12fps, D1@12fps	Main stream: 8MP Lite@8fps, 5MP Lite@12fps, 4MP Lite@15fps, 1080P@15fps, 720P@30fps Sub stream: D1@8fps, D1@12fps, D1@15fps, D1@15fps, D1@30fps
<b>CAPABILITY</b>	Analog: 4 x 8MP Lite@8, 4x 5MP Lite@12, 4x 4MP Lite@15, 4 x 1080P@15 IP: 1 x 4MP@30, 2 x 1080P@30	Analog: 8 x 8MP Lite@8, 8x 5MP Lite@12, 8x 4MP Lite@15, 8x 1080P@15 IP: 1 x 8MP@30, 2 x 4MP@30, 4 x 1080P@30	Analog: 16 x 8MP Lite@8, 16x 5MP Lite@12, 16x 4MP Lite@15, 16 x 1080P@15 IP: 24 x D1@30, 16 x 720P@30, 8 x 1080P@30	Analog: 16 x 8MP Lite@8, 16x 5MP Lite@12, 16x 4MP Lite@15, 16 x 1080P@15, 16 x 720@30 IP: 16 x 720P @30, 8 x 1080P@30 4 x 4M P@30 2 x 8M P@30
<b>SATA</b>	1 SATA interface		2 SATA interfaces	
<b>CAPACITY</b>	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)			
<b>GENERAL ALARM</b>	Motion Detection / Ultra Motion Detection			
<b>USB INTERFACE</b>	Rear panel: 2 x USB2.0		Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0	
<b>WORKING ENVIRONMENT</b>	-10°C - + 55°C ( +14°F - +131°F ), Humidity ≤ 90% RH(non-condensing)			
<b>DIMENSIONS(W×D×H)</b>	260mm ×226mm× 47mm (10.2" × 8.9"×1.8")		380mm ×318mm× 53.50mm (14.96" × 12.51"×2.1")	380mm ×326mm× 53mm (15.0" × 12.8"×2.1")
<b>WEIGHT (WITHOUT HDD)</b>	≤1.1 Kg ( 2.42lb )		≤2.0 Kg ( 4.4lb )	≤2.6 Kg ( 5.72lb )
<b>NDAA COMPLIANT</b>	Yes			

ALIBI VIGILANT CAMERAS:

# The Latest Technology

## Advanced Optics and Chipsets = Better Video



### Starlight Technology Delivers Color in Low Light

Advanced Starlight chipsets produce amazing color video in ultra-low light conditions. The imagers utilize ambient light sources to create high quality, color video at night.



### Quality Lenses = Better Video

Don't settle for cheaper models that use plastic lenses. Vigilant cameras feature glass lenses that provide higher quality, crisper video. Deliver high quality video footage to your customers with every Vigilant model. Better components mean better video capture.


**YouTube** See the difference with sample video on our website or YouTube channel

## SmartSense Technology

**SmartSense technology virtually eliminates false alarms for human and vehicle detection by employing AI learning**


Look for our cameras that utilize AI deep learning algorithms to more accurately identify human and vehicle targets. The newest generation of cameras featuring this SmartSense technology is extremely accurate and significantly reduces false alarms.

- Accurate Human and Vehicle Detection
- Reduce False Triggers by up to 90%
- Saves Storage and Search Time

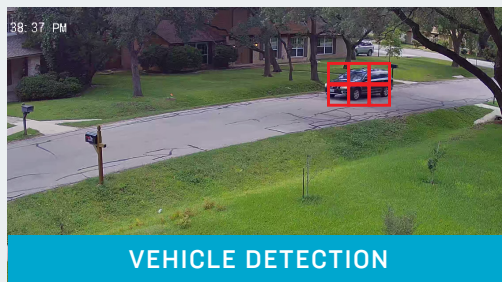

## Powerful LEDs Light Up the Night for Color 24/7

Select Vigilant models feature IllumiNite technology - white light LEDs built in by the lens. These powerful white light LEDs can be set on a schedule or activated by PIR in order to act as a deterrent and more importantly to illuminate the FOV so you deliver color video all day and all night.

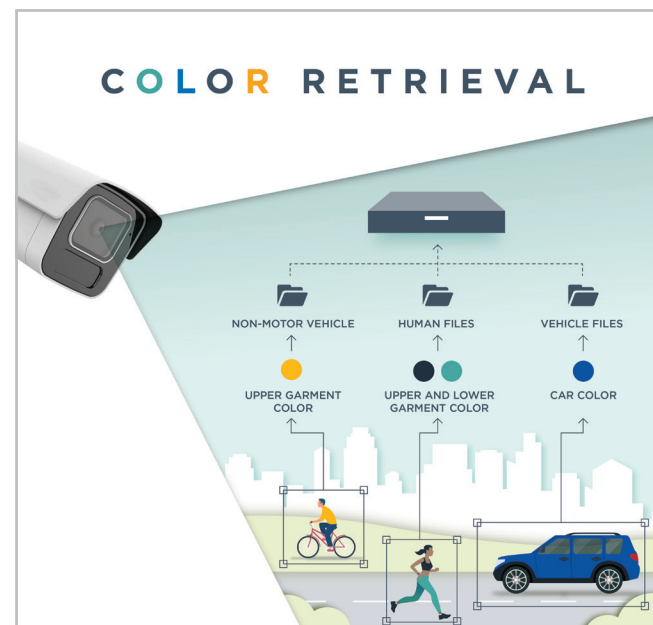

### IntelliSearch Color Retrieval

IntelliSearch cameras capture color attribute metadata for human and vehicles applying that data to recorded footage. This enables AI algorithms on IntelliSearch recorders to sort footage by object by color attribute, helping you find footage faster!

## Advanced IR Features

The latest advancements in infrared technology help to deliver crisp, high-contrast images in the dark. Look for Smart IR and Full-frame Illumination technology if you want great nighttime images.

- **Smart IR** - auto-throttles IR illumination based on object distance, eliminating bounce back and blooming
- **Full-Frame Illumination** - produces clearer, brighter images across the entire video frame (see inset to learn more)

These powerful features also deliver up to 30% energy savings over standard IR technology.

## Camera Integrations Help You Win More Jobs

Alibi Security works with leading providers in the security industry to give you the ability to include Alibi gear in a wide variety of applications. Alibi cameras integrate with the following providers. Contact your account manager for more information.



# Flex Series IP Cameras


Powerful features and technology make these cameras flexible for many applications

- WDR for crisp, clear color images
- Powerful, built-in Smart Analytics
- Ultra H.265 compression for lower storage needs
- Triple streams for better bandwidth management



IR anti-reflective 'window' reduces potential for IR bounceback from dome cover

All Vigilant cameras feature Smart IR and Full Frame Illumination for higher contrast nighttime images and less blooming

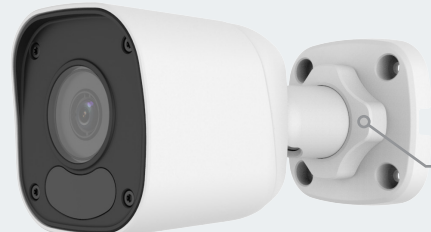

2-axis/3-axis gimbal adjustments for a more precise FOV

## Flex Series IP Cameras | Turret Cameras

FIXED	FIXED	FIXED
2MP IP Fixed Turret Camera ALI-FT21-A	NEW! 2MP IP Fixed Turret Camera ALI-FT22-A	NEW! 4MP IP Fixed Turret Network Camera ALI-FT40-A
<b>2MP</b>	<b>2MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
112.9° FOV	112.9° FOV	97° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Colour: 0.01 lux ( F2.0, AGC ON) 0 lux with IR	.02 low-light Lux Rating
98' IR distance	98' IR distance	98' IR distance
IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	4.6" x 3.8"	4.6" x 3.8"
NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-IN, ALI-SE45-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-I-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-B-IN

## Flex Series IP Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED	FIXED	VARIFOCAL
2MP 98' IR Vandal-resistant IP Dome Camera ALI-FD20-VAW	2MP IP Vandal-Resistant Dome Camera ALI-FD21-V	NEW! 2MP IP Vandal-Resistant Dome Camera ALI-FD22-VA	NEW! 4MP Starlight IP Vandal-Resistant Dome Camera ALI-FD41-VU-D	NEW! 8MP Starlight Vandal Resistant IP Fixed Dome Camera with Built-in Microphone ALI-FD81-VUA-D	4MP Starlight 131' IR Varifocal Vandal-Resistant IP Dome Camera with Built-in Mic ALI-FD41-UVZ
<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>4MP</b>	<b>8MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8-12mm motorized zoom lens
101° FOV	112.5° FOV	112.9° FOV	101.1° FOV	113° FOV	102.79-30.86° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Colour: 0.01 lux ( F2.0, AGC ON) 0 lux with IR	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03"	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005"	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	98' IR distance	98' IR distance	98' IR distance	98' IR distance	130' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range
4.29" x 3.3"	4.3" x 3.2"	4.3" x 3.3"	4.3" x 3.2"	4.3" x 3.3"	5.8" x 4.4"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-IN, ALI-SE45-A-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN

FIXED	FIXED	FIXED	FIXED	FIXED	VARIFOCAL
4MP Starlight IP Turret Camera ALI-FT41-UA-D	NEW! 4MP IP Vandal-Resistant Dome Camera ALI-FD41-V	4MP IP Turret IllumiNite Camera ALI-FT40-LA	8MP Starlight IP Fixed Turret Camera with Built-in Microphone ALI-FT81-UA-D	NEW! 8MP IP Fixed Turret Camera ALI-FT80-A	4MP Starlight Varifocal IP Turret Camera ALI-FT40-UZA
<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>8MP</b>	<b>8MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8-12mm auto focus motorized zoom lens
105.3° FOV	97° FOV	110.4° FOV	113° FOV	112.9° FOV	102.79-30.86° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	0.002 low-light Lux rating	Color: 0.0005lux (F1.0, AGC ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Colour: 0.01 lux (F1.6, AGC ON) 0Lux with IR on	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR distance	98' IR distance	98' IR distance	98' IR distance	98' IR distance	131' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
5.1" x 4.3"	4.3" x 3.2"	4.6" x 4.2"	4.6" x 3.8"	4.6" x 3.8"	5.1" x 4.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-I-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WMO3-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM05-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WMO3-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN

### Alibi Integration Center: Configuration & Customization

Our in-house integration services enhance your solution, simplify the installation process, and build your brand.

- **Recorder Configuration** Pre-install hard drives, and ensure all recorders ship with the latest firmware.
- **Custom Configuration** Pre-configure cameras, pair with recorders, and pre-set to your specifications.
- **OEM Configuration** Customize our gear with YOUR logo - keeping your brand top of mind with your customers.



### Alibi Warehouse: Dealer Friendly Fulfillment

Our supply chain and fulfillment teams ensure that the products you need are in-stock and delivered on-time, regardless of your location.







- ✔ **Consolidated Shipping**  
All Alibi items on your order ship at the same time from ONE warehouse location.
- ✔ **Fast, Free Shipping**  
All orders qualify for FREE two day shipping and most orders placed by 3pm CT ship same day.
- ✔ **Advanced Replacement**  
In the unlikely event of product failure, we ship a replacement immediately, so your customer is never left waiting.







Flex Series IP Cameras | **Bullet Cameras**

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
2MP 98' Smart IR Wi-Fi Bullet Camera ALI-FB20-AW	2MP IP Bullet Camera ALI-FB21-A	NEW! 2MP IP Fixed Bullet Camera ALI-FB22-A	NEW! 4MP IP Bullet 98 ft IR 2.8mm DWDR Built-in Mic Ultra H.265 SD-Card ALI-FB40-A	4MP IP Bullet IllumiNite Camera ALI-FB40-LA	4MP Starlight IP Mini Bullet Camera ALI-FB41-UA-D
<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	112.5° FOV	112.9° FOV	97° FOV	110.4° FOV	101.1° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	0.01 low-light Lux rating	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.02"	Color: 0.0005lux (F1.0, AGC ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03
98' IR distance	98' IR distance	98' IR distance	100' IR distance	98' IR distance	164' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
6.5" x 2.5" x 2.5"	6.5" x 2.5" x 2.5"	6.5" x 2.5" x 2.5"	5.6" x 2.4" x 2.6"	8.1" x 2.9" x 2.9"	6.5" x 2.5" x 2.5"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN

Performance Series IP Cameras | **Turret Cameras**

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
NEW! 4MP Starlight SmartSense 98' IR IP Turret Camera ALI-PT40-UA1-D	4MP Starlight SmartSense IP Fixed Turret Camera with White Light Strobes and Audible Alarm ALI-PT40-UAIS	4MP Starlight SmartSense 98 Feet IR IP Turret Camera ALI-PT40-VLUAI	NEW! 4MP Starlight SmartSense 131 Feet IR IP Turret Camera ALI-PT41-UA1	5MP 66' IR Turret Camera ALI-PT50-VUAIF	NEW! 5MP Starlight SmartSense 98' IllumiNite LED IP Turret Camera w/ Built-in Mic ALI-PT50-LUAI-D
<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>5MP</b>	<b>5MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	1.68mm fixed lens	2.8mm fixed lens
101° FOV	101° FOV	109° FOV	97.68° FOV	180° FOV	102° FOV
"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003"	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON)	"Colour: 0.002Lux (F1.6, AGC ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001"
98' IR distance	98' IR distance	98' IR distance	131' IR distance	66' IR distance	98' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	4.6" x 3.8"	5.1" x 4.3"	5.1" x 4.3"	4.4" x 3.7"	4.4" x 3.7"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

FIXED	FIXED	FIXED	VARIFOCAL
			
NEW! 5MP HD-TVI/AHD/CVI/CVBS Starlight IllumiNite Fixed Bullet Security Camera ALI-AB50-LUAOC	NEW! 8MP IP Bullet 98 ft IR 2.8mm WDR Built-in Mic Ultra H.265 SD-Card ALI-FB80-A	8MP Starlight IP Mini Fixed Bullet Camera with Built in Microphone ALI-FB81-UA-D	4MP Starlight T64 IR Varifocal IP Bullet Camera ALI-FB41-UZA
<b>5MP</b>	<b>8MP</b>	<b>8MP</b>	<b>4MP</b>
3.6mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8-12mm auto-focus and motorized zoom lens
---	112.9° FOV	113° FOV	102.79-30.86° FOV
Color : 0.03 lux@F2.0, 0 Lux with white light	"Colour: 0.01 lux (F1.6, AGC ON) OLux with IR on	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.005	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
82' IR distance	98' IR distance	164' IR distance	164' IR distance
IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
171(W) x 73(H) x 73(D)mm	6.3" x 2.4" x 2.5"	7.5 x 2.9 x 2.8	8.1" x 2.9" x 2.9"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB1	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN

**The Best Tech Support in the Industry**

When you have problems you need solutions—not long wait times or poor advice. That's why we employ as many technical support agents as we do sales and product agents at our call center. Our team is here for you:






**1.5**  
Average minutes to answer calls

**9.7/10**  
Tech Support Dealer Rating

**100%**  
Personnel in the United States

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
NEW! 5MP Starlight SmartSense 98' IR IP Turret Camera ALI-PT50-UA1-D	NEW! 5MP Starlight SmartSense 131' IR IP Turret Camera ALI-PT51-UA1	6MP Starlight IP Fixed Turret Camera ALI-PT60-UA	6MP Starlight IP Fixed Turret Camera ALI-PT60-UAB	NEW! 8MP 98' IR SmartSense Fixed IP Turret Camera ALI-PT81-AI-D	8MP Starlight SmartSense IllumiNite 98 Feet IR IP Turret Camera ALI-PT80-VLUAI
<b>5MP</b>	<b>5MP</b>	<b>5MP</b>	<b>6MP</b>	<b>8MP</b>	<b>8MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
96° FOV	110.71° FOV	96° FOV	96° FOV	112.5° FOV	110° FOV
"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003"	Starlight technology: Color: 0.002Lux, 0 Lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01"	Lux (B/W): 0.0 (IR ON)
98' IR distance	131' IR distance	98' IR distance	98' IR distance	98' IR distance	98' IR distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.8"	5.1" x 4.3"	4.4" x 3.7"	4.4" x 3.7"	5.0" x 3.7"	5.1" x 4.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-JB03-G-IN-B, ALI-UC08-C, ALI-WM03-D-IN-B	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-B-IN

Performance Series IP Cameras | Turret Cameras

VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
				
4MP Varifocal 98' IR Turret IP Camera with Audio ALI-PT40-UZAI	4MP IP Vandal Turret IllumiNite Starlight SmartSense Camera ALI-PT40-VLUZAI	5MP Starlight Varifocal Vandal-resistant 131' IR Turret Camera ALI-PT50-UZAI	6MP Starlight IP Varifocal Turret Camera ALI-PT60-VUZA	8MP Starlight Varifocal Vandal-resistant 131' IR IP Turret Camera ALI-XT81-UZAI
<b>4MP</b>	<b>4MP</b>	<b>5MP</b>	<b>6MP</b>	<b>8MP</b>
2.7-13.5mm automatic focusing and a motorized zoom lens	2.8-12mm, automatic focusing and motorized zoom lens	2.7-13.5mm, automatic focusing and a motorized zoom lens	2.7mm-13.5mm varifocal motorized lens	2.8-12 mm automatic focusing and a motorized zoom lens
98.26°-31.35° FOV	102.4°-49.2° FOV	106.25°-30.42° FOV	30°-106° FOV	107.4°-29.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Colour: 0.0005 lux (F1.2, AGC ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
131' IR distance	98' IR distance	131' IR distance	130' IR distance	131' IR distance
IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
5.1" x 4.3"	5.1" x 4.3"	5.1" x 4.3"	5.1 x 4.3	5.1" x 4.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB03-J-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN

Color, All Day & All Night

Powerful IllumiNite™ white light LED, located below the lens, provides illumination bright enough to capture color images even in pitch-black conditions.



Feature powerful white light LEDs that illuminate the FOV for color 24/7

Features built in SmartSense capabilities to more accurately detect humans and vehicles, reducing false alarms

Starlight chipsets use ambient light to provide crisp color in extreme dark







All Flex Series and most Performance Series products meet the technical requirements set forth in NDAA Section 889 Part A for video security solutions. Visit [alibisecurity.com/nda](http://alibisecurity.com/nda) for more information.






Get Social With Us

Our Facebook page and YouTube channels help keep you up-to-date with the latest resources and promotions. Follow us on Facebook and subscribe to our YouTube channel to get the newest information first.

Performance Series IP Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED
			
4MP Starlight SmartSense Mini-Wedge Vandal-resistant IP Fixed Dome Camera ALI-PM41-VAI	4MP IP Starlight SmartSense Mini Dome Camera ALI-PM40-UAI	4MP Starlight SmartSense 98 Feet IR IP Dome Camera ALI-PD40-VUAI	NEW! 4MP Starlight SmartSense 131' IR IP Vandal-Resistant Dome Camera ALI-PD41-VUAI
<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	101° FOV	101.1° FOV	97.68° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Colour: 0.002 lux (F1.6, AGC ON) 0 lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	"Starlight technology: Color: 0.002Lux, 0 Lux with IR "
98' IR Distance	98' IR Distance	98' IR Distance	131' IR Distance
IP67	---	IP67	IP67
-31°F-140°F operating temperature range	-22°F-131° operating temperature range	-22°F-140° operating temperature range	-22°F-140° operating temperature range
4.28" x 2.43"	4.3" x 2.4"	4.3" x 3.2"	4.4" x 3.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

FIXED	FIXED	FIXED	FIXED
			
NEW! 5MP Starlight SmartSense 98' IR IP Dome Camera ALI-PD50-VUAI-D	NEW! 5MP Starlight SmartSense 131' IR IP Vandal-Resistant Dome Camera ALI-PD51-VUAI	6MP Starlight IP Dome Camera ALI-PD60-VUA	6MP Starlight IP Dome Camera ALI-PD60-VUAB
<b>5MP</b>	<b>5MP</b>	<b>6MP</b>	<b>6MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
96.1° FOV	110.71° FOV	96° FOV	96° FOV
"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003"	"Starlight technology: Color: 0.002Lux, 0 Lux with IR "	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	131' IR Distance	98' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67
-22°F-140° operating temperature range	-22°F-140° operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.3" x 3.2"	4.4" x 3.3"	4.3" x 3.2"	4.3" x 3.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-JB03-G-IN-B, ALI-UC08-C, ALI-WM03-D-IN-B



We're Your Full Service Security Solutions Partner

Our comprehensive range of professional services gives you a competitive advantage, enabling you to provide your customers with the best possible solution and service for their specific applications.

Product Configuration Services:







- Extended Burn-in
- Pre-programming and Configuration
- Custom Labeling
- Custom Solution Integration

Project Pre-Sale Consulting







- Pre-sale system design assistance
- Scalability assessments
- Large project rollout design

Feel like a potential job is too big to handle? Let our team help. We can help define project solutions, coordinate shipping and manage installation logistics in partnership with your team.

Performance Series IP Cameras | **Dome Cameras**

FIXED	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
					
8MP SmartSense Starlight IP Fixed Dome Camera ALI-PD81-AI	4MP IP Vandal Dome Starlight SmartSense Camera ALI-PD41-VUZAI	5MP Starlight SmartSense Varifocal Vandal-Resistant 131' IR IP Dome Camera ALI-PD50-VUZAI	5MP Stainless Steel 65' IR Starlight IP Varifocal Dome Camera ALI-SD50-UZ	6MP Starlight IP Varifocal Dome Camera ALI-PD60-VUZAI	8MP Starlight SmartSense Varifocal Vandal-Resistant 131' IR IP Dome Camera ALI-XD81-VUZAI
<b>8MP</b>	<b>4MP</b>	<b>5MP</b>	<b>5MP</b>	<b>6MP</b>	<b>8MP</b>
2.8mm fixed lens	2.7-13.5mm Motorized VF	2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.7-13.5mm motorized varifocal lens	2.8-12mm auto focus motorized zoom lens
112.5° FOV	103.58°-31.05° FOV	106.25°-30.42° FOV	107°(W)-33.5°(T) FOV	30°-106° FOV	107.4°- 29.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Colour: 0.002 lux (F1.2, AGC ON) 0 lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	98' IR Distance	131' IR Distance	65' IR Distance	130' IR Distance	131' IR Distance
IP67	IP66	IP67	IP68	IP67	IP67
-22°F-140°F operating temperature range	-22°F-131°F operating temperature range	-22°F-140°F operating temperature range	32°-122° operating temperature range	-22°F-140° operating temperature range	-22°F-140° F operating temperature range
4.3" x 3.2"	5.04" x 3.94"	5.8" x 4.4"	3.14" x 4.64" x 3.48"	5.8" x 4.4"	5.8" x 4.4"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-G-IN, ALI-JB07-WM03-G-IN, ALI-SE24-IN, ALI-SE45-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07-WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07-WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN	<b>Compatible brackets:</b> no compatible brackets	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07-WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-FM152-A-IN, ALI-JB04-C-IN, ALI-JB07-WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-SM04-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM04-IN

Performance Series IP Cameras | **Bullet Cameras**

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
4MP Starlight SmartSense IP Fixed Bullet Camera with White Light Strobes and Audible Alarm ALI-PB40-UAIS	4MP Starlight SmartSense 131' IR IP Bullet Camera ALI-PB40-UAI	4MP 164' IR Pan/Tilt IP Bullet Camera with Audio ALI-PS40-A	4MP SmartSense Starlight 262' Extended IR IP Fixed Bullet Camera ALI-PB40-UAIE	4MP IllumiNite Starlight SmartSense Fixed Bullet IP Camera with Audio/Alarm ALI-PB40-VLUAI	NEW! 4MP Starlight SmartSense 262' IR IP Bullet Camera ALI-PB41-UAI
<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>
2.8mm fixed lens	2.8mm fixed lens	4.0mm fixed lens	4.0mm fixed lens	4.0mm fixed lens	2.8mm lens
101° FOV	101.1° FOV	78° FOV	83.6° FOV	103° FOV	110.71° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.02	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	"Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002"
98' IR Distance	131' IR Distance	164' IR Distance	262' IR Distance	98' IR Distance	262' IR Distance
IP67	IP67	IP66	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
8.1" x 2.9" x 2.9"	6.1" x 2.5" x 2.5"	14.1" x 4.2" x 7.7"	8.1" x 2.9" x 2.9"	9.6" x 3.4" x 3.3"	10.6" x 3.8" x 3.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

**DON'T JUST TAKE OUR WORD FOR IT!**

# What Our Dealers Are Saying

★★★★★

**Extremely Satisfied Customer**

The fact that we have been doing business with your company for over ten years speaks volumes more than anything I could possibly write here. It is not often one finds a company that offers quality products that are reasonably priced and backed by superb customer support, knowledgeable sales staff, and gives me the benefit of offering my clients a hassle-free warranty! I hope to be doing business with you for another ten years, at least.


*-Nicholson Security, Lehigh Valley, PA*









## Learning Opportunities 24/7/365

**Sharpen Your Security Solution Skills!**







The Alibi Security YouTube channel offers more than 200 videos to help you learn everything about video security.






FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
			<b>NEW!</b> 5MP Starlight SmartSense 262' IR IP Bullet Camera ALI-PB51-UAI		
5MP Starlight SmartSense 98' LED IllumiNite IP Bullet Camera ALI-PB50-VLUAI	5MP Starlight SmartSense 131' IR IP Bullet Camera ALI-PB50-UAI	5MP 66' IR IP Bullet Camera ALI-PB50-UAIF	<b>NEW!</b> 5MP Starlight SmartSense 262' IR IP Bullet Camera ALI-PB51-UAI	6MP Starlight IP Fixed Bullet Camera ALI-PB60-UA	6MP Starlight IP Fixed Bullet Camera ALI-PB60-UAB
<b>5MP</b>	<b>5MP</b>	<b>5MP</b>	<b>5MP</b>	<b>6MP</b>	<b>6MP</b>
4.0mm fixed lens	2.8mm fixed lens	1.68mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
80.2° FOV	96.1° FOV	180° FOV	110.71° FOV	96° FOV	96° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0 lux (IR ON) Lux (Color): 0.01	"Lux (B/W): 0.0 (IR on) Lux (Color): 0.002"	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
98' IR Distance	131' IR Distance	66' IR Distance	262' IR Distance	131' IR Distance	131' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
9.7" x 3.4" x 3.3"	6.1" x 2.5" x 2.5"	7.8" x 2.8" x 2.8"	10.6" x 3.8" x 3.2"	6.1" x 2.5" x 2.5"	6.1" x 2.5" x 2.5"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-A-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-JB05-A-IN-B, ALI-UC08-C


Performance Series IP Cameras | **Bullet Cameras**

FIXED	FIXED	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
					
ALI-PB81-AI	ALI-PB80-VLUAI	ALI-XB20-VUZAI-ANPR	ALI-PB40-UZAI	ALI-PB40-VUZAIE	ALI-PB40-VLUZAI
<b>8MP</b>	<b>8MP</b>	<b>2MP</b>	<b>4MP</b>	<b>4MP</b>	<b>4MP</b>
2.8mm fixed lens	4mm fixed lens	4.7-47mm motorized zoom lens	2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.8-12mm automatic focusing and motorized zoom lens
112.4° FOV	94° FOV	58.9°H FOV	98.26°- 31.35° FOV	42.6°-113.7° FOV	102.4°- 49.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.0005	Color: 0.0005 lux (F1.2, AGC ON), 0 lux with IR/LED on
98' IR Distance	98' IR Distance	165' IR Distance	164' IR Distance	262' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-40°F-140°F operating temperature range	-22°F-140°F operating temperature range	-40°F-158°F operating temperature range	-22°F-140°F operating temperature range
7.5" x 3.0" x 2.9"	9.6" x 3.4" x 3.3"	15.2" x 5.1"	9.7" x 3.4" x 3.4"	5.1" x 12.7"	9.6" x 3.4" x 3.3"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-SM03-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

Performance Series IP Cameras | **PTZ Cameras**

FIXED	FIXED	FIXED	FIXED	VARIFOCAL	VARIFOCAL
					
ALI-PF40-LUA	ALI-PF51-VA	ALI-XS50-UVA	ALI-XF120-VAI	ALI-PZ20-LUZAI	ALI-PZ21-UZA
<b>4MP</b>	<b>5MP</b>	<b>5MP</b>	<b>12MP</b>	<b>2MP</b>	<b>2MP</b>
2.8mm fixed lens	1.4mm fixed lens	2.8mm fixed lens	1.8mm fixed lens	4X optical zoom	4.5-148.5mm auto focus motorized zoom lens
160° FOV	360° FOV	106° FOV	360° FOV	Pano 102.4° PTZ 106.6° - 30.6°	56.2°-2.6° FOV
Lux (Color): 0.0005 (0.0 with light)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.03	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001
98' IR Distance	33' IR Distance	33' IR Distance	49' IR Distance	164' IR Distance	492' IR Distance
IP67	IP66	IP66	IP67	IP66	IP66
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	32°F-122°F operating temperature range	-22°F-140°F operating temperature range	-4°F-140°F operating temperature range	-40°F-149°F operating temperature range
10.7" x 5.1" x 3.0"	4.9" x 1.7"	7.48" x 1.57" x 1.66"	5.9" x 2.2"	5.3" x 7.6" x 11.9" (Wall Mount), 5.3" x 6.1" x 14.3" (Ceiling Mount)	8.9" x 14.2"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> No compatible brackets	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB04-D-IN, ALI-JB07/WM04-B-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C	<b>Compatible brackets:</b> ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN	<b>Compatible brackets:</b> ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN, ALI-WE45-IN

VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
				
ALI-SB50-UZ	ALI-PB50-UZAI	ALI-PB60-VUZA	ALI-PB80-VUZAIE	ALI-XB81-UZAI
<b>5MP</b>	<b>5MP</b>	<b>6MP</b>	<b>8MP</b>	<b>8MP</b>
2.8-12mm varifocal lens	2.7-13.5mm auto focus motorized zoom lens	2.7-13.5mm auto focus motorized zoom lens	2.8-12mm varifocal lens	2.8-12mm auto focus motorized zoom lens
107°(W)-33.5°(T) FOV	106.25°- 30.42° FOV	30°-106° FOV	48°-101° FOV	107.4°-29.2° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.002	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003
131' IR Distance	164' IR Distance	164' IR Distance	262' IR Distance	164' IR Distance
IP68	IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-40°-140°F operating temperature range	-22°F-140°F operating temperature range
2.83" x 6.63" x 4.72"	9.7" x 3.4" x 3.4"	9.6" x 3.4" x 2.8"	5.1" x 12.7"	9.6" x 3.4" x 2.8"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> No compatible brackets	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN

VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL	VARIFOCAL
					
ALI-PZ40-VUZAI	ALI-PZ40-UZAI	ALI-PZ40-VUZAI-B	ALI-PZ50-LUZAIS	ALI-PZ51-UZA	ALI-XF160-UA
<b>4MP</b>	<b>4MP</b>	<b>4MP</b>	<b>5MP</b>	<b>5MP</b>	<b>16MP</b>
4.8-120mm motorized varifocal zoom lens	4.8-120 mm motorized varifocal zoom lens & 4mm fixed lens	4.8-120mm varifocal lens	2.8-12mm motorized varifocal zoom lens	2.7-13.5mm auto focus motorized zoom lens	4 x 2.8mm lens
2.7°-52.2° FOV	3.09-55.46° FOV & 91.3° FOV	---	30.6°-104.1° FOV	27.9-98.3° FOV	180° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Color: 0.003 lux (F1.6, AGC ON) 0 lux with IR	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.003	---
328' IR Distance	328' IR Distance	328' IR Distance	164' IR Distance	98' IR Distance	164' IR Distance
IP67	IP66	IP67	IP66	---	IP67
-40°F-158°F operating temperature range	-40°F-149°F operating temperature range	-40°F-158°F operating temperature range	-4°F-140°F operating temperature range	-40°F-158° operating temperature range	-40°F-158° operating temperature range
6.5" x 11.6"	6.4" x 12.0"	6.5" x 11.6"	5.2" x 10.6"	5.1" x 5.7"	10.2" x 8.3" x 4.5"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	No
<b>Compatible brackets:</b> ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN, ALI-WE45-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-CE45-IN, ALI-JB12-IN, ALI-SE45-A-IN, ALI-SE45-IN, ALI-UC08-A-IN, ALI-UC08-B-IN, ALI-UF45-A-IN, ALI-UP08-A-IN, ALI-UP08-B-IN, ALI-WE45-A-IN, ALI-WE45-B-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB06-A-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-CM24-IN, ALI-JB03-H-IN, ALI-JB07/WM03-F-IN, ALI-SE24-A-IN, ALI-SE24-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-B-IN	<b>Compatible brackets:</b> ALI-CM06-C-IN, ALI-JB07-D-IN, ALI-UC08-C, ALI-UP06-B-IN, ALI-UP06-IN, ALI-UV06-C-IN, ALI-WE45-D-IN

Flex HD Series Cameras | Turret Cameras

FIXED	FIXED	FIXED	FIXED
ZMP HD-TVI/AHD/CVI/CVBS Fixed Turret Security Camera ALI-AT20	ZMP IllumiNite Starlight Fixed HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT20-LU	ZMP IllumiNite Starlight Fixed HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT20-LU28	ZMP Starlight HD-TVI/AHD/CVI/CVBS Fixed Turret Security Camera ALI-AT21-U
<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>2MP</b>
3.6mm fixed lens	3.6mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
79° FOV	88° FOV	107° FOV	89° FOV
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)
65' IR Distance	85' IR Distance	85' IR Distance	65' IR Distance
IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range
3.66" x 2.91"	4.29" x 3.66"	4.29" x 3.66"	3.72" x 3.25"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB1, ALI-WB1	<b>Compatible brackets:</b> ALI-JB2, ALI-WB1	<b>Compatible brackets:</b> ALI-JB2, ALI-WB1	<b>Compatible brackets:</b> ALI-JB3

**We're Your Full-Service Security Solutions Partner**

Our comprehensive range of professional services gives you a competitive advantage, enabling you to provide your customers with the best possible solution and service for their specific applications.

**Product Configuration Services:**

- Extended Burn-in
- Pre-programming and Configuration
- Custom Labeling
- Custom Solution Integration

**Project Pre-Sale Consulting**

- Pre-sale system design assistance
- Scalability assessments
- Large project rollout design

FIXED	FIXED	FIXED	FIXED	FIXED	VARIFOCAL
5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT51-UZ	5MP IllumiNite 131ft 4-in-1 Fixed Turret Security Camera ALI-AT52-LA	5MP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT52-UA-D	8MP Starlight HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT80-AU	8MP White Light HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT80-AL	ZMP HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT20-Z
<b>5MP</b>	<b>5MP</b>	<b>5MP</b>	<b>8MP</b>	<b>8MP</b>	<b>5MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	2.8-12mm manual zoom lens
107° FOV	111.5° FOV	109.1° FOV	107° FOV	90° FOV	94° - 32° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	.005 Lux	.005 Lux	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)
65' IR Distance	131' IR Distance	131' IR Distance	65' IR Distance	80' IR Distance	100' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-122°F operating temperature range	-22°F-122°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range
3.66" x 2.91"	4.37" x 3.78"	4.37" x 3.78"	3.66" x 2.91"	4.29" x 3.66"	4.68" x 3.85"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB7	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-JB1, ALI-WB1	<b>Compatible brackets:</b> ALI-JB2, ALI-WB1	<b>Compatible brackets:</b> ALI-JB2, ALI-WB2

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
ZMP IllumiNite 131ft 4-in-1 Fixed Turret Security Camera ALI-AT22-LA	ZMP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT22-UA	4MP Starlight 131ft 4-in-1 Fixed Turret Security Camera ALI-AT42-UA	5MP 65 ft IR 4-in-1 HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT50-AOC	5MP Starlight White Light HD-TVI/AHD/CVI/CVBS Turret Camera ALI-AT50-LAOC	5MP Starlight HD-TVI/AHD/CVI/CVBS Vandal Resistant Fixed Dome Camera ALI-AT51-U
<b>2MP</b>	<b>2MP</b>	<b>4MP</b>	<b>5MP</b>	<b>5MP</b>	<b>5MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens	2.8mm fixed lens
101.5° FOV	101.5° FOV	97.7° FOV	90° FOV	91° FOV	91° FOV
.005 Lux	.005 Lux	.005 Lux	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01
131' IR Distance	131' IR Distance	131' IR Distance	65' IR Distance	82' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-122°F operating temperature range	-22°F-122°F operating temperature range
4.4" x 3.78"	4.4" x 3.78"	4.4" x 3.78"	4.29" x 3.66"	3.72" x 3.26"	3.72" x 3.26"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-JB1, ALI-WB1	<b>Compatible brackets:</b> ALI-JB2, ALI-WB1	<b>Compatible brackets:</b> ALI-JB3

VARIFOCAL	VARIFOCAL	VARIFOCAL	FIXED
NEW! 8MP HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT81-Z	5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Turret Security Camera ALI-AT50-UZ	5MP Starlight HD-TVI/AHD/CVI/CVBS Turret Security Camera ALI-AT50-VUZ	ZMP Starlight HD-TVI/AHD/CVI Fixed Lens Box Camera ALI-AX20-U
<b>8MP</b>	<b>5MP</b>	<b>5MP</b>	<b>2MP</b>
2.7-13.5mm varifocal lens	2.7-13.5mm auto focus motorized zoom lens	2.7-13.5mm motorized varifocal lens	---
---	103° - 29° FOV	103° - 29° FOV	---
Color : 0.01 lux@F1.6, AGC ON; B/W : 0 lux with IR	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	---
82' IR Distance	100' IR Distance	131' IR Distance	---
IP67	IP67	IP67	---
14°F-122°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F - 140°F operating temp range
5.35" x 5.83"	4.68" x 3.85"	4.68" x 3.85"	5.82" x 3.11" x 2.24"
NDAA Compliant	NDAA Compliant	NDAA Compliant	---
<b>Compatible brackets:</b> ALI-WB2	<b>Compatible brackets:</b> AJ1, ALI-JB2, ALI-WB2, WB02	<b>Compatible brackets:</b> ALI-WB2	<b>Compatible brackets:</b> No compatible brackets

**Real Time Pricing Guarantee**

Every day, we shop our competitors\*, and adjust our prices on like products to deliver you the best value.





**See a better price on the same product?**


Call us! And we'll match it—or better it!

Log in to your Partner account for your **real-time LOW PRICES.**

\*Competitors are defined in collaboration with our Partners. Competitive products are comparable in specification, function and warranty. Competitive suppliers offer value-added services, such as inventory management, technical support, and returns management.

Flex HD Series Cameras | Dome Cameras

FIXED	FIXED	FIXED	FIXED
			
2MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Dome Security Camera ALI-AD21-U	2MP Starlight 98ft 4-in-1 Vandal-Resistant Fixed Dome Security Camera ALI-AD22-VUA	5MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Vandal Resistant Fixed Dome Security Camera ALI-AD51-U	5MP Starlight 98ft 4-in-1 Vandal-Resistant Fixed Dome Security Camera ALI-AD52-VUA
<b>2MP</b>	<b>2MP</b>	<b>5MP</b>	<b>5MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
101° FOV	101.5° FOV	91° FOV	109.1° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.001	0.005 lux	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	0.005 lux
65' IR Distance	98' IR Distance	65' IR Distance	98' IR Distance
IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-140°F operating temperature range
4.6" x 3.45"	4.29" x 3.25"	4.6" x 3.45"	109" x 3.25"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB4	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN	<b>Compatible brackets:</b> ALI-JB4	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB03-G-IN, ALI-JB07/WM03-G-IN, ALI-UC08-C, ALI-UM06-E-IN, ALI-UP06-IN, ALI-WM03-D-IN

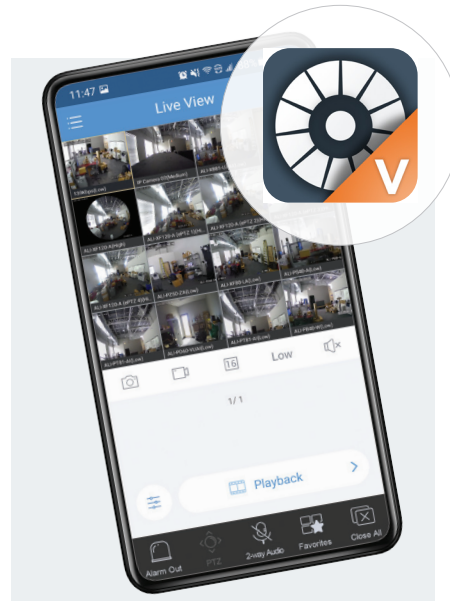





Alibi Vigilant Mobile App

- Simple set up using a P2P account ... no more port-forwarding!
- Centrally manage user rights & permissions for an unlimited number of recorders or cameras
- Supports up to 256 channels
- Activate cloud firmware updates directly from the app
- Take snapshots or record live video directly from your mobile device
- Store up to 16 Alibi devices at once
- Add, delete, or modify connected devices
- Manage PTZ camera controls using your touchscreen
- Digitally zoom in during live video or remote playback modes
- Mix and match live views to access multiple Alibi recorders and IP cameras
- Compatible with Alibi Vigilant DVRs, NVRs, IP cameras and PTZs



Flex HD Series Cameras | Bullet Cameras

FIXED	FIXED	FIXED	FIXED	FIXED	FIXED
					
2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Starlight 85 Feet IllumiNite LED Fixed Bullet Security Camera ALI-AB20-UL28	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera ALI-AB20	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera ALI-AB20-U	2MP 4-in-1 HD-TVI/AHD/CVI/CVBS Starlight 85 Feet IllumiNite LED Fixed Bullet Security Camera ALI-AB20-UL2	2MP IllumiNite 131ft 4-in-1 Fixed Bullet Security Camera ALI-AB22-LA	2MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic ALI-AB22-UA
<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>2MP</b>	<b>2MP</b>
2.8mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	3.6mm fixed lens	2.8mm fixed lens	2.8mm fixed lens
89° FOV	79° FOV	79° FOV	88° FOV	101.5° FOV	101.5° FOV
Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	.005 Lux Rating	.005 Lux Rating
100' IR Distance	80' IR Distance	200' IR Distance	85' IR Distance	131' IR Distance	131' IR Distance
IP67	IP67	IP67	IP67	IP67	IP67
14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range
6.6" x 2.93" x 2.93"	6.73" x 2.87" x 2.75"	6.65" x 2.65" x 2.75"	8.66" x 4.13" x 4.29"	6.2" x 2.62" x 2.62"	6.06" x 2.60" x 2.60"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB1	<b>Compatible brackets:</b> ALI-JB1	<b>Compatible brackets:</b> ALI-JB2	<b>Compatible brackets:</b> ALI-JB1	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN

FIXED	FIXED	FIXED	FIXED
			
4MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic ALI-AB42-UA	5MP 4-1 Bullet 131 ft IR Starlight 2.8mm DWDR Built-in Mic ALI-AB52-UA	5MP 4-1 Bullet 131 ft IllumiNite 2.8mm DWDR Built-in Mic ALI-AB52-LA	5MP HD-TVI/AHD/CVI/CVBS Fixed Bullet Security Camera ALI-AB50
<b>4MP</b>	<b>5MP</b>	<b>5MP</b>	<b>5MP</b>
2.8mm fixed lens	2.8mm fixed lens	2.8mm fixed lens	3.6mm fixed lens
97.7° FOV	109.1° FOV	111.5° FOV	90° FOV
0.005 lux (F1.6, AGC ON) 0 lux (IR ON)	.005 Lux Rating	0.005 lux (F1.4, AGC ON) 0 lux (white light on)	Lux (B/W): 0.0 (IR ON)
131' IR Distance	131' IR Distance	131' IR Distance	80' IR Distance
IP67	IP67	IP67	IP67
-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	-22°F-140°F operating temperature range	14°F-140°F operating temperature range
6.06" x 2.60" x 2.60"	6.06" x 2.60" x 2.60"	2.26" x 2.62" x 2.62"	6.73" x 2.87" x 2.75"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-A01-IN, ALI-JB05-B-IN, ALI-JB06-IN, ALI-UC08-C, ALI-UP06-C-IN	<b>Compatible brackets:</b> ALI-JB1



**Low Prices Guaranteed on All Cable**  
If you find a lower price on same-spec cable, we'll match it or beat it. Call us today.

Flex HD Series Cameras | **Bullet Cameras**


FIXED	FIXED	VARIFOVAL	VARIFOVAL	VARIFOVAL
				
5MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Varifocal Bullet Camera ALI-AB51-U	8MP Starlight HD-TVI/AHD/CVI/CVBS Bullet Security Camera ALI-AB80-U	2MP Starlight Varifocal HD-TVI/AHD/CVI/CVBS Bullet Camera ALI-AB20-UZ	5MP Starlight 4-in-1 HD-TVI/AHD/CVI/CVBS Varifocal Bullet Camera ALI-AB51-UZ	5MP Starlight HD-TVI/AHD/CVI/CVBS Varifocal Bullet Security Camera ALI-AB50-UZ
<b>5MP</b>	<b>8MP</b>	<b>2MP</b>	<b>5MP</b>	<b>5MP</b>
2.8mm fixed lens	3.6mm fixed lens	2.7-13.5mm motorized varifocal lens	2.8-12mm varifocal lens	2.7-13.5mm varifocal lens
91° FOV	88° FOV	103°-29° FOV	91.2°-33.4° FOV	103°-29° FOV
Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON)	Lux (B/W): 0.0 (IR ON) Lux (Color): 0.01	Lux (B/W): 0.0 (IR ON)
100' IR Distance	80' IR Distance	130' IR Distance	165' IR Distance	130' IR Distance
IP67	IP67	IP67	IP67	IP66
-22°F-122°F operating temperature range	14°F-140°F operating temperature range	14°F-140°F operating temperature range	-22°F-122°F operating temperature range	14°F-122°F operating temperature range
6.59" x 2.93" x 2.93"	6.73" x 2.87" x 2.75"	8.66" x 4.13" x 4.29"	8.51" x 3.16" x 3.16"	7.04" x 3.70" x 3.66"
NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant	NDAA Compliant
<b>Compatible brackets:</b> ALI-JB3	<b>Compatible brackets:</b> ALI-JB1	<b>Compatible brackets:</b> ALI-JB2	<b>Compatible brackets:</b> ALI-JB3	<b>Compatible brackets:</b> ALI-JB2

Brackets and Accessories


					
ALI-A01-IN Junction Box Waterproof Joint	ALI-CE45-IN Pendant Mount	ALI-CM06-C-IN Pendant Mount	ALI-CM24-IN Pendant Mount	ALI-FM152-A-IN In-ceiling Mount	ALI-JB03-G-IN Junction Box
					
ALI-JB03-G-IN-B Junction Box	ALI-JB03-H-IN Junction Box	ALI-JB03-I-IN Junction Box	ALI-JB03-J-IN Junction Box	ALI-JB04-C-IN Junction Box	ALI-JB04-D-IN Junction Box
					
ALI-JB05-A-IN Junction Box	ALI-JB05-A-IN-B Junction Box	ALI-JB05-B-IN Junction Box	ALI-JB06-A-IN Junction Box	ALI-JB07/WM03-F-IN Junction Box with Wall Mount	ALI-JB07/WM03-G-IN Junction Box with Wall Mount
					
ALI-JB07/WM04-B-IN Junction Box with Wall Mount	ALI-JB07-D-IN Junction Box	ALI-JB12-IN Junction Box	ALI-SE24-IN Pendant Mount	ALI-SE24-A-IN Pendant Mount	ALI-SE45-IN Pendant Mount
					
ALI-SE45-A-IN Pendant Mount	ALI-SM04-IN Electric-box Transfer Plate	ALI-SM05-IN Electric-box Transfer Plate	ALI-UC08-A-IN Corner Mount	ALI-UC08-B-IN Corner Mount	ALI-UC08-C Corner Mount
					
ALI-UF45-A-IN Pendant Mount	ALI-UF45-H-IN Plate Adapter	ALI-UP06-IN Pole Mount	ALI-UP06-B-IN Pole Mount	ALI-UP06-C-IN Pole Mount	ALI-UP08-A-IN Pole Mount
					
ALI-UP08-B-IN Pole Mount (Steel)	ALI-UM06-E-IN Tilted Mount	ALI-UV06-C-IN 2D Bracket Mount	ALI-WE45-IN PTZ Short Wall Mount	ALI-WE45-A-IN PTZ Long Wall Mount	ALI-WE45-B-IN PTZ Parapet Wall Mount
					
ALI-WE45-D-IN Pano Wall Mount	ALI-WM03-B-IN Wall Mount	ALI-WM03-D-IN Wall Mount	ALI-WM04-IN Wall Mount		

## Public View Monitor


Multi-use Public View Display Security Monitors deter theft in high-traffic and self-checkout areas. Add advertisements in full screen, banner, and switching modes. Deterrence audio can also be added to trigger warning sound clips.

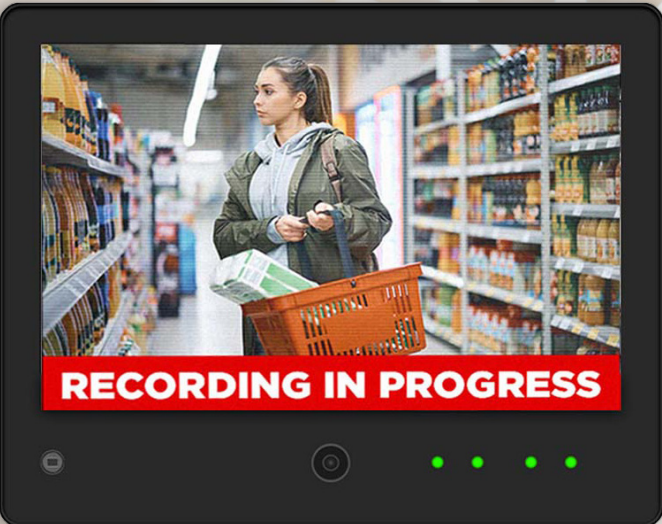


**RECORDING IN PROGRESS**



10.1 Inch Public View Display Security Monitor with Built-In 2MP Fixed IP Camera  
ALI-PVM10L



Mount and Clamp for 10 inch PVM  
ALI-PVM10M



**LEARN MORE**  
Get the more out of your PVM monitor!



Alibi Security is excited to announce a first-of-its-kind technology partnership with Brivo, the industry leader and worldwide name in cloud-based access control.

## Brivo + Alibi = Better Together

Brivo and Alibi Security have partnered to launch a new program — **BRIVO ACCELERATE** — to drive your access control and video security growth with the following benefits:

### Alibi | Brivo Resellers enjoy:

- Complete Brivo product line
- Competitive pricing
- Brivo certified training
- Dedicated Brivo technical support

### PLUS: Alibi offers:

- Dedicated US-based sales support
- Cloud solutions specialists
- FREE Sales Flyers & Product Slicks
- FREE digital marketing tools

## Why Brivo?

Brivo is the global leader in cloud-based access control and smart space technology company. Our open platform, powered by AI does it all.

Brivo was access control built in the cloud before cloud security was cool... and has led ever since. The Brivo platform allows customers:

- Flexibility and choice in how they move to the cloud
- The ability to connect whatever, whenever, device or software to enhance security
- Video, access and more — all in one place
- To enable the right people to do the right things at the right time, without friction

...and you do it all in Brivo.



## Camera-to-Cloud Video Surveillance

### Simple, Scalable & Secure

Alibi Cloud VS is a cost-effective solution that allows you to stream and retain video surveillance footage in an ultra-secure cloud environment. Alibi Cloud VS is engineered to deliver cutting-edge reliability, scalability and cyber-security.

1

Simply install compatible cloud-enabled IP camera(s) and connect to your pre-set Alibi Cloud VS account via WiFi or LAN

2

Video footage streams directly to our ultra-secure, T4 level data center for storage


3

Easily view live or recorded video via mobile devices or on any browser on the web.



### Alibi Cloud VS Adds to Your Bottom Line

- **Up-Front Revenue** Earn revenue on your installation of cameras and installation services
- **Revenue Each Month** Build Recurring monthly revenue on cloud subscriptions
- **Quicker Installations** Eliminates the need for extra wiring, recording devices and bridges to configure
- **More Secure** Adhere to state or federal requirements for off-premise video storage, retention and access
- **Fewer Service Calls** No recorders or hard drives to fix along with continuous firmware, security, and software updates via the cloud

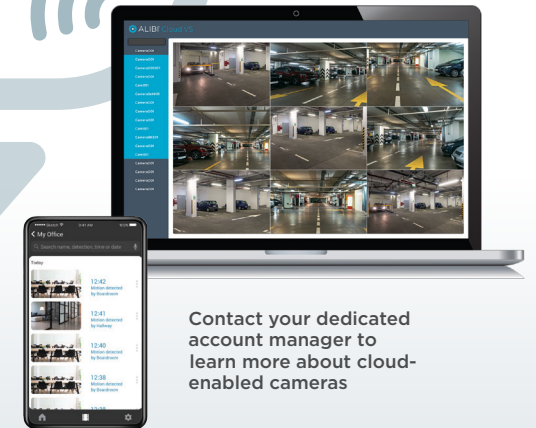

Contact your dedicated account manager to learn more about cloud-enabled cameras

## Alibi Cloud VS Features

### Auto Backup Sync

Alibi Cloud VS supports micro SD card backup and syncing. If the internet goes out footage automatically records to the SD card and syncs back to the cloud when service is restored.

### Easy Browser Access

No apps are required! Our web portal allows you to view live and recorded video and to manage system settings all through your favorite browser.

### Dealer Dashboard

The Dealer Dashboard portal gives you visibility to all your subscriptions, reporting tools, health info and remote support tools.

Schedule a live demo with our Alibi Cloud VS Specialist: **877.917.9057**

ALIBI CLOUD IS POWERED BY







15505 Long Vista Drive, Building 250  
Austin, Texas 78728  
FAX 866.936.7257

WE PROUDLY SELL AND SUPPORT PRODUCTS  
FROM THESE PARTNERS:



Visit our website for our complete assortment of gear and accessories  
from these trusted providers.



Learn more about our Vision,  
Mission and Commitment to You.

888-858-1440 | [alibisecurity.com](http://alibisecurity.com)